



JENLIGHTING

KOK-4E6E

## LED SLIM DOWN LIGHT



### FEATURES AND SPECIFICATIONS

#### Construction

- Edge-lit technology, with no glare or dark spots
- Continuous dimming from 100% to 10%
- Instant on
- No flicker

#### Electrical

- Input Voltage: AC120V 50/60Hz
- Triac dimming. IC rated.
- THD≤10%, PF≥0.95

#### Applications

- Offices, retail, schools, restaurants, healthcare, residential, and hospitality applications.

#### Installation

- Surface mounted
- Recessed

#### Listing

- ETL Listed.
- Energy Star.

#### Warranty


- 5-year limited warranty

Specs at a Glance		* Nominal Wattage (Switchable)	
Configuration	KOK-4EJCT09SR05		KOK-6EJCT12SR05
CCT (K)	5CCT 2700K 3000K 3500K 4000K 5000K		
Wattage (W)*	9W		12W
Lumens (lm)	752 lumens		1006 lumens
Efficacy (LPW)	83.5lm/w		83.8lm/w
Size	4 inch		6 inch
CRI	>80		
Input Voltage	120V		
Operating Temp	-20°C-40°C		
Certifications	ETL Listed & Energy Star		
Warranty	5-year limited warranty		

4inch & 6inch: Easily flip the switch for desired CCT



## Dimensions

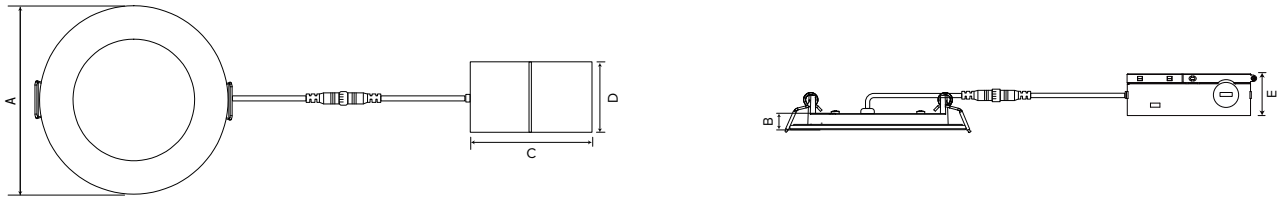

Size	A	B	C	D	E
4inch	Ø4.92 [125mm]	0.39" [9.9mm]	3.94" [100mm]	2.68" [68mm]	1.34" [34mm]
6inch	Ø6.89 [175mm]	0.39" [9.9mm]	3.94" [100mm]	2.68" [68mm]	1.34" [34mm]


## Accessories



J-Box driver



Connector



Hole cutout card




Hole Size

4INCH:  
4 21/64"(110mm)  
6INCH:  
6 19/64"(160mm)

## Installation Instruction


### HOLE SIZE

3INCH: 3 5/64" (78mm)  
 4INCH: 4 21/64" (110mm)  
 6INCH: 6 19/64" (160mm)  
 8INCH: 8 5/64" (205mm)




1. Turn off the power before installation. Remove the existing fixture if applicable. Determine the location and necessary hole cutout diameter using the supplied table and cut the ceiling hole with the listed approximate diameter

Black — L  
 White — N  
 Copper — G




2. Open the J-Box cover and remove the appropriate knockout(s) on the side panel. Install the appropriate cable clamp(s) (not included) and insert the electrical supply cable through the cable clamp. Connect the supply wires to the fixture wires by using 3 connectors. Attach white to white, black to black, copper to the ground wire.


5 IN 1 27K/30K/35K/40K/50K  
 27K/30K/40K/50K/60K  
 3 IN 1 30K/40K/50K

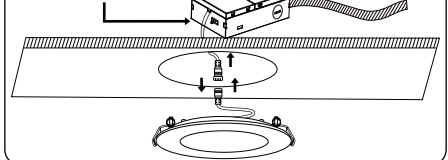

3. Insert j-Box through the mounting hole and secure it, connect the fixture power cable to the J-Box. Select lamp color desired with the CCT switch.

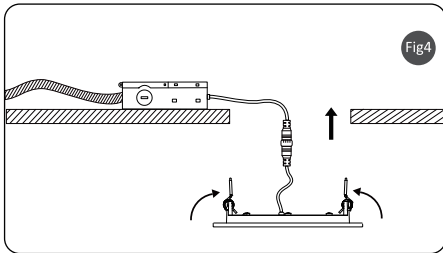

4. Push the spring-loaded clips into the mounting hole upwards and in the fixture into it. Release the clips and the fixture will be pulled flush to the ceiling.

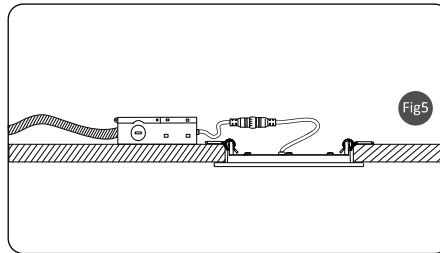

5. Turn on the power after installation, check the fixture can work well.