




JENLIGHTING

JEN-LS02

## LED UP DOWN LINEAR LIGHT

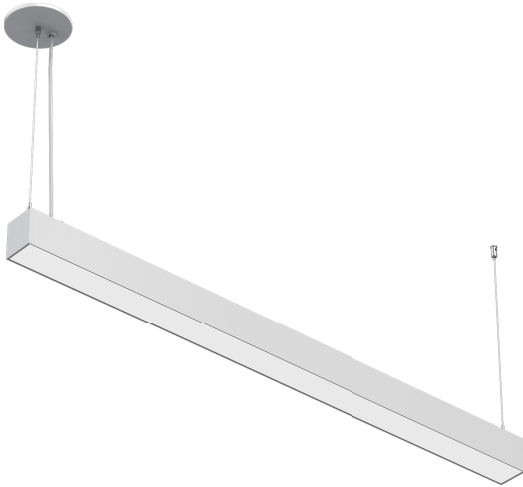

### FEATURES AND SPECIFICATIONS

#### Construction

- Light Direction is selectable from Down only, Up only or both Down & Up lights.
- Five lighting distribution ways switchable: Up 100%+Down 0%, Up 70%+Down 30%, Up 50%+Down 50%, Up 30%+Down 70%, Up 0%+Down 100%, .
- Control CCT of down or uplight individually, Switch from 3500K, 4000K & 5000K.
- Sensor and emergency battery backup are available.

#### Electrical

- Working voltage 120-277V
- 0-10V dimming standard for a dimming range of 100% to 0%.
- Operating Temperature Range: -20°C to +45°C (-4°F - +113°F).
- Note: Operating with emergency battery temperature range: 5°C to 45°C (+41°F - +113°F).

#### Applications

- Commercial area, Residential area, Convention center, Office, Lobby hospitality, Showroom, Hotel.

#### Installation

- Pendant mounting, surface mounting and wall mounting standard.
- Linkable mounting: 15pcs MAX unique end cap simplifies installation, seamless continuous runs or individuals.

#### Listing

- UL listed.
- DesignLights Consortium ®(DLC)Premium

#### Warranty

- 5-year limited warranty

Specs at a Glance	* Nominal Wattage (Switchable)
Configuration	DB77E-4-50W- A5C3
CCT (K)	UP 3500K 4000K 5000K Tunable DOWN 3500K 4000K 5000K Tunable
Wattage (W)*	50/35/25/15W adjustable
Lumens (lm)	50W=6500lumens 35W=4550lumens 25W=3250lumens 15W=1950lumens
Efficacy (LPW)	130lm/w
Size	4FT
CRI	>80
Input Voltage	AC120-277V
Operating Temp	-20°C-48°C
Certifications	UL&DLC 5.1 Premium
Warranty	5-year limited warranty




JENLIGHTING

JEN-LS02

## Ordering information

Model	Description
DB77E-4-50W- A5C3	4FT linear strip light, Power Switchable 50W/35W/25W/15W, Color Switchable 3500K/4000K/5000K 120-277VAC/120-347VAC


## Color Temperature & Light Distribution Field Adjustable Controls

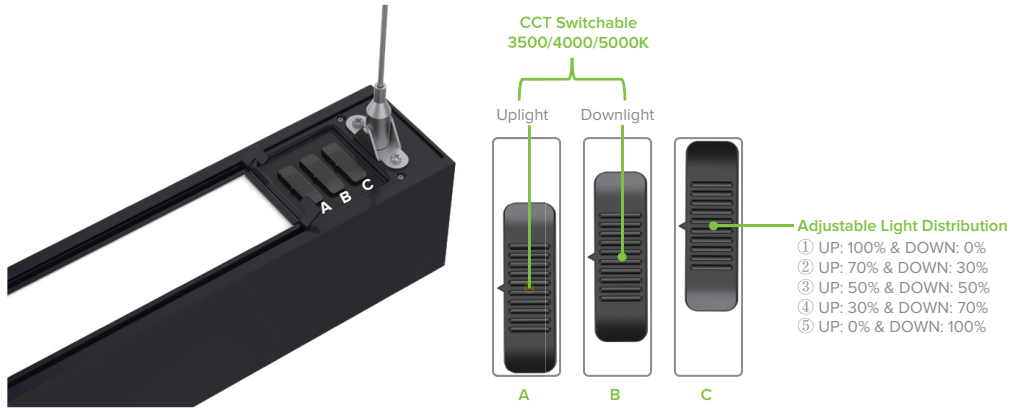

Pendant  
(Up&down)





Pendant  
(Up)






Pendant  
(Down)


## Seamless continuous connection easily

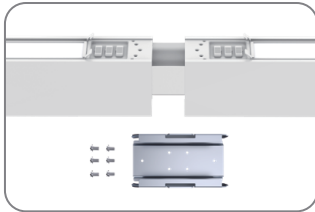

## Link Pattern

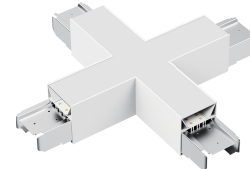


## Dimensions

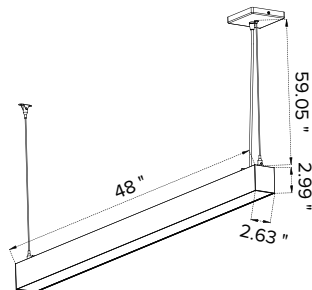

4FT: L x W x H  
48" x 2.63" x 2.99"  
(1219.2x66.8x75.95mm)

## Accessories



Straight Connector



L Connector



T Connector



+Connector









Cuttible Flexible Cover



Round Canopy &  
Power Cable

## Installation Instruction

### Suspension installation with square surface plate.

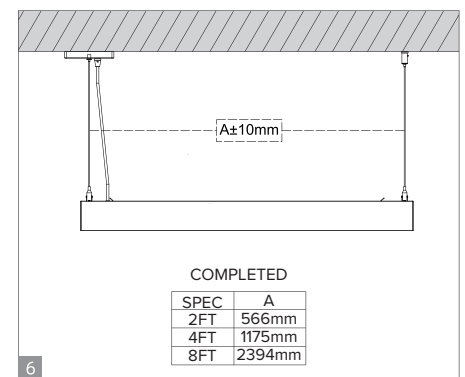
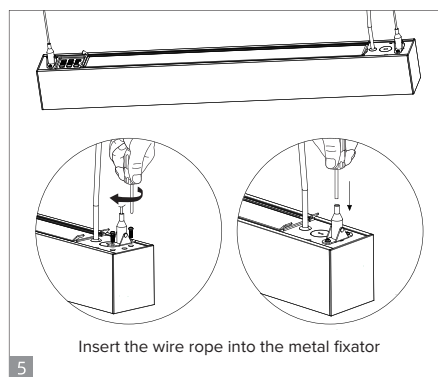
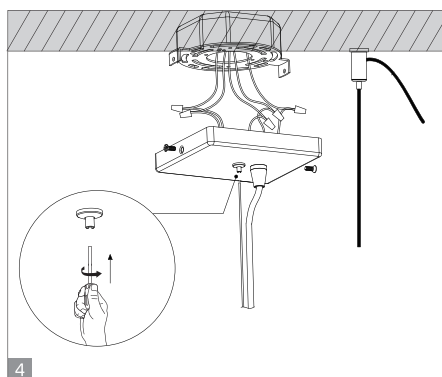
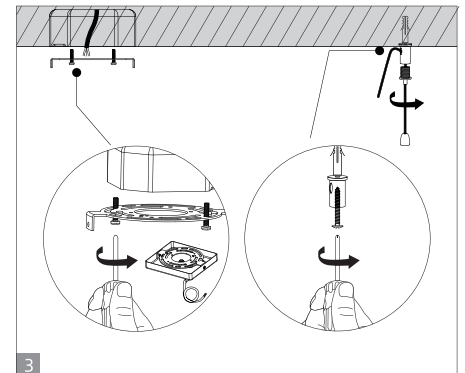
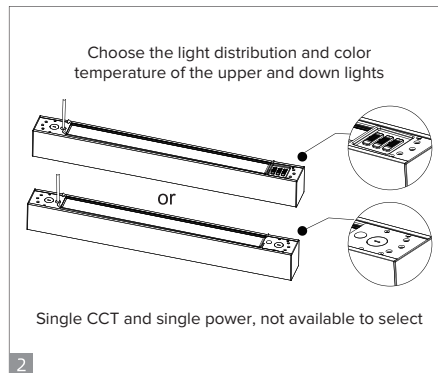
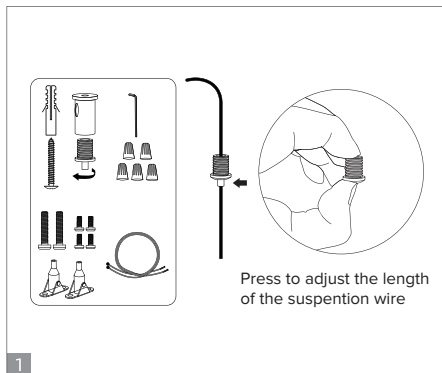









JENLIGHTING

JEN-LS02


### Suspension installation with round surface plate

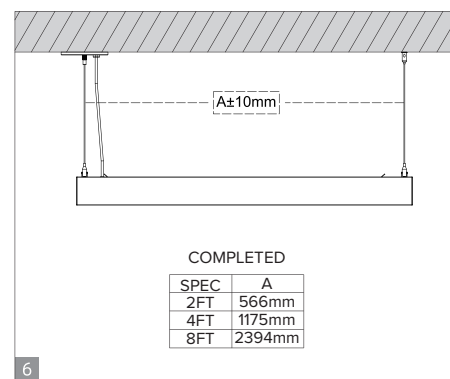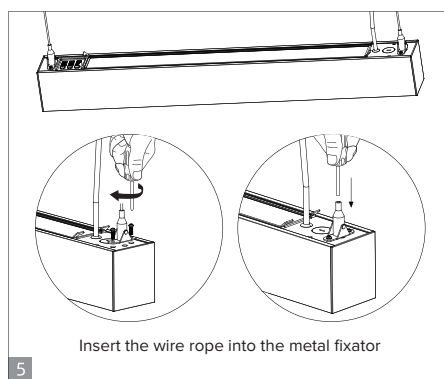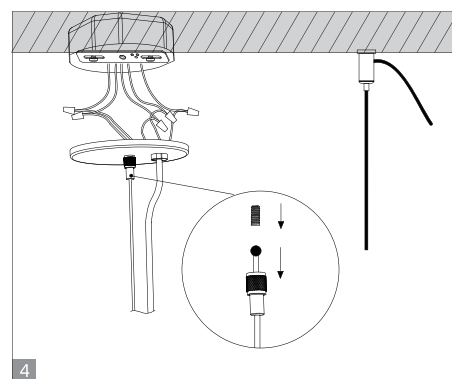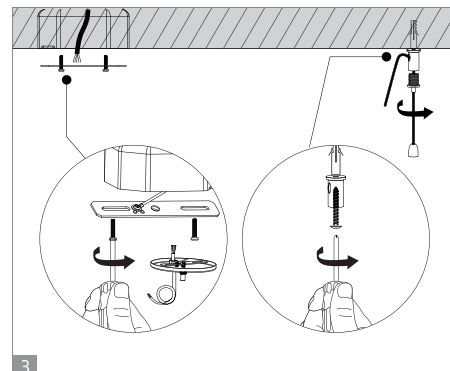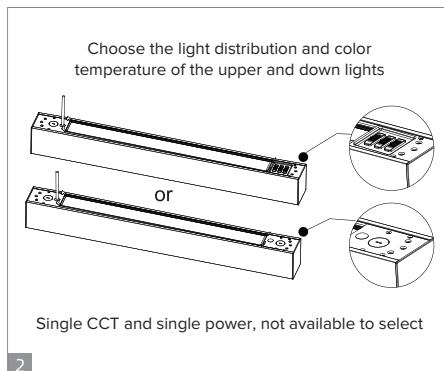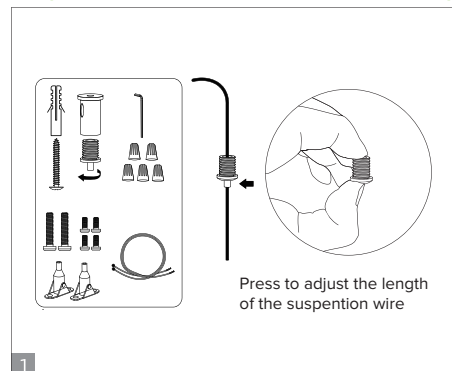


### Wall mounted installation

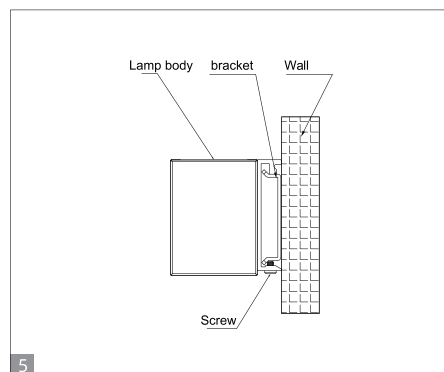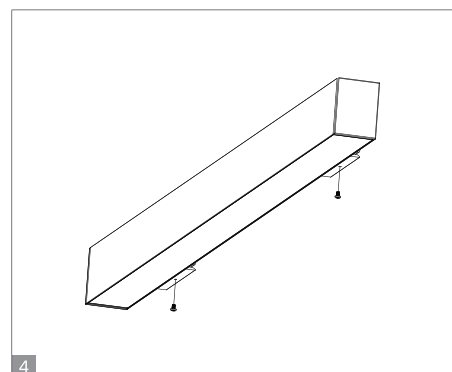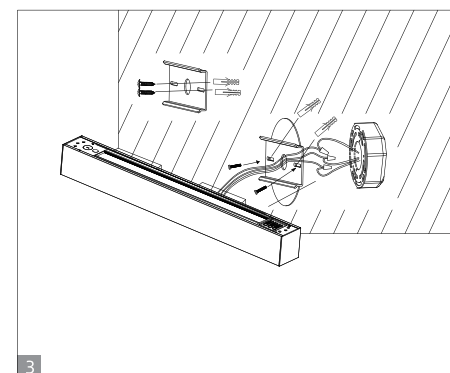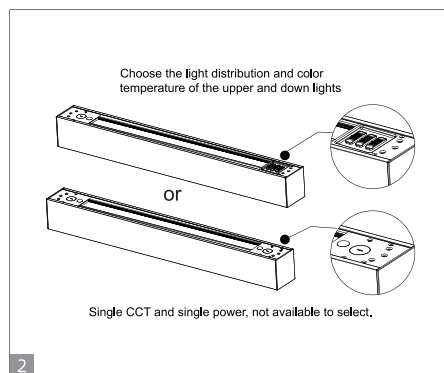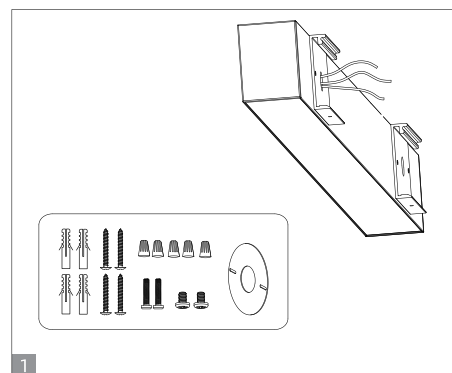

## Cover installation

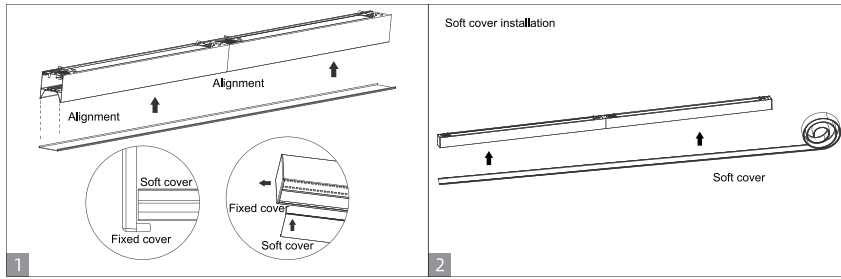

## Link Pattern

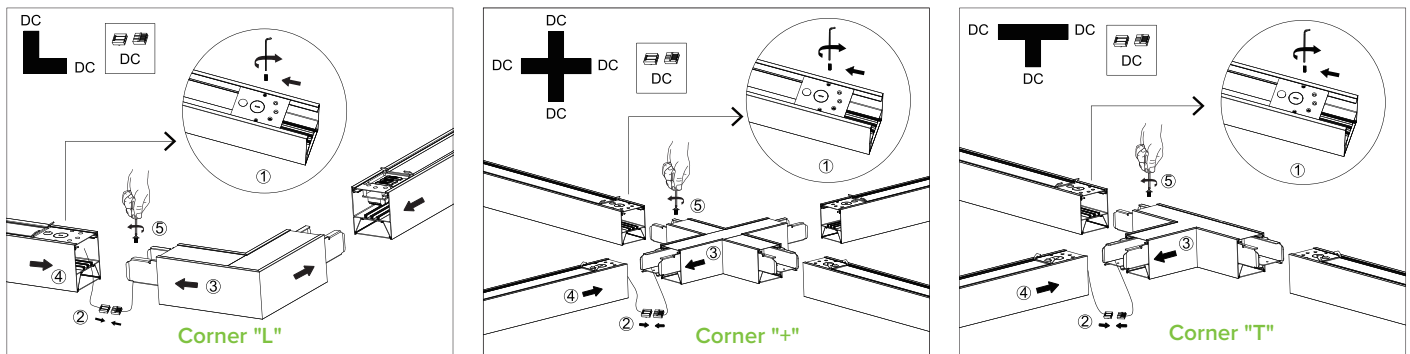

## Packing Information

Model number	L /inch	W /inch	H /inch	QTY/ctn	G.W./lbs	CTN QTY/ pallet
DB77E-4-50W- A5C3	52.3	10.2	17.3	6	46.7	/