



JEELIGHTING

LED TROFFER LIGHT

J-T2-S40-3565 [Blank, -S] | J-T4-S50-3565 [Blank, -S] | J-T4-S72-3565 [Blank, -S]

DESCRIPTION

2' x 2' | 2' x 4' LED Troffer light | Wattage Selectable | CCT Selectable |
130lm/W | 0-10V Dimming | With Sensor Base

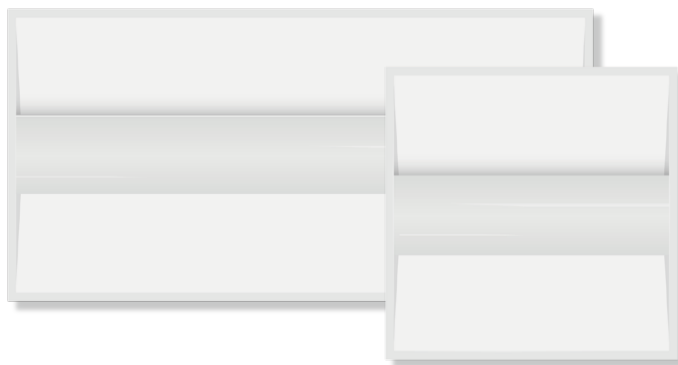

CONSTRUCTION

Constructed of one-piece ribbed unitized housing and corners that interlock, preventing damage to luminaire. All sides and corners are turned in and hemmed, removing sharp edges for safe handling and installation.

ELECTRICAL

Luminaire is built with the highest quality driver that is Universal Voltage (120V-277V), uses long lasting, highly-efficient LED packages.

DRIVER

Driver is fixed on the back of the panel to prevent mis-handling during shipment.

OPTICAL SYSTEM

Designed to reduce glare and improve light distribution through precision formed

DIMMING

Continuous dimming (0-10V) comes standard.

ENERGY SAVINGS

Over 50% energy savings than traditionally fluorescent fixtures, low heat productions requires less maintenance and operation cost.

LISTING

ETL, DLC, FCC, RoHS

WARRANTY

5 Years Limited Warranty, Rated for 50,000 hours (Refer to your warranty documentation for more information.)

FEATURES

Size	2'x2' / 2'x4'
5Wattage	M40W / M50W / M72W
5CCT	3500K/4000K/5000K/ 5700K/6500K (Selectable)
Efficiency	125-130lm/W
Lumens	1950-9000lm
Beam Angle	120°
Input Voltage	120-277V AC
Frequency Range	50/60Hz
CRI	>80
PF	>0.9
THD	<=20%
Dimming	0-10V DC
Sensor Base	YES
Lifetime	50,000 hours



LED TROFFER LIGHT

J-T2-S40-3565[Blank,-S] | J-T4-S50-3565[Blank,-S] | J-T4-S72-3565[Blank,-S]

ORDERING INFORMATION

Model	Size	Wattage	Voltage	Lumens	Efficacy	CCT	Dimming	Dimensions
J-T2-S40-3565[Blank,-S]	2x2	15W, 20W, 25W, 30W, 40W (Selectable)	120-277V	1950lm, 2600lm, 3250lm, 3750lm, 5000lm	125- 130 lm/W	3500K, 4000K, 5000K, 5700K, 6500K (Selectable)	0-10V	23.74"L x 23.74"W x 2.12"H
J-T4-S50-3565[Blank,-S]	2x4	25W, 30W, 35W, 40W, 50W (Selectable)	120-277V	3250lm, 3900lm, 4550lm, 5000lm, 6250lm	125- 130 lm/W	3500K, 4000K, 5000K, 5700K, 6500K (Selectable)	0-10V	47.72"L x 23.74"W x 2.12"H
J-T4-S72-3565[Blank,-S]	2x4	30W, 40W, 50W, 60W, 72W (Selectable)	120-277V	3900lm, 5000lm, 6250lm, 7500lm, 9000lm	125- 130 lm/W	3500K, 4000K, 5000K, 5700K, 6500K (Selectable)	0-10V	47.72"L x 23.74"W x 2.12"H



Multiple Sensor Solutions

Quick and Easy in-field installation of sensors.

(The sensor receptacle is pre-embedded in the profile frame.)



Sensor

Model Number	Sensor Type	Connector	Controller
HD08VR-M-1B	Microwave	Audio Jack	Remote Control HD06R
HD08VR-MB-1B 	Microwave		HAISEN BLUE APP
HD08VR-PB-1B	PIR		Remote Control HD06R
HD08VR-PB-1B 	PIR		HAISEN BLUE APP




LED TROFFER LIGHT

J-T2-S40-3565[Blank,-S] | J-T4-S50-3565[Blank,-S] | J-T4-S72-3565[Blank,-S]

PHYSICAL SPECIFICATIONS



Unit: mm/inch

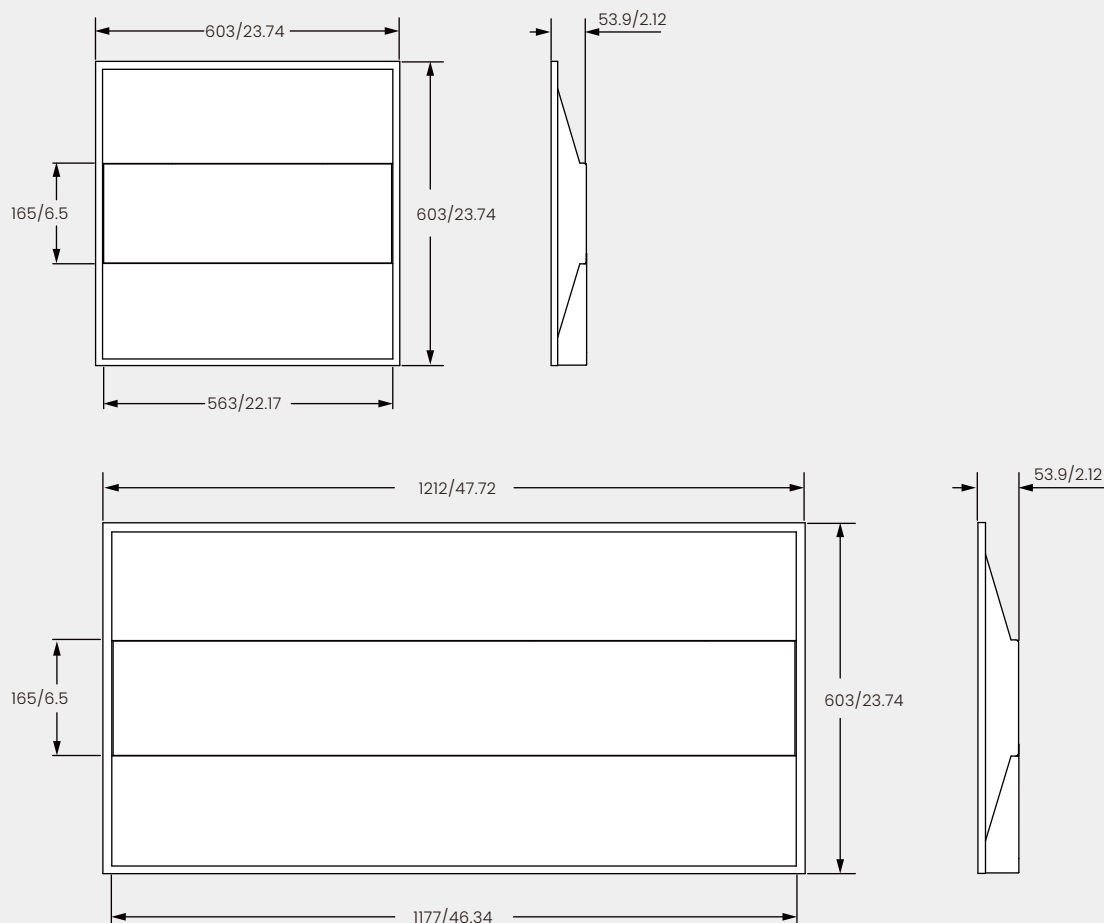

Dimensional tolerances: (+1.5mm, -1.0mm)

PHOTOMETRIC DATA

2' x 2'



2' x 4'

